


## DuraSquare Handrinse basin, furniture handrinse basin # 0732450041 / 0732450070

| < 450 mm > |

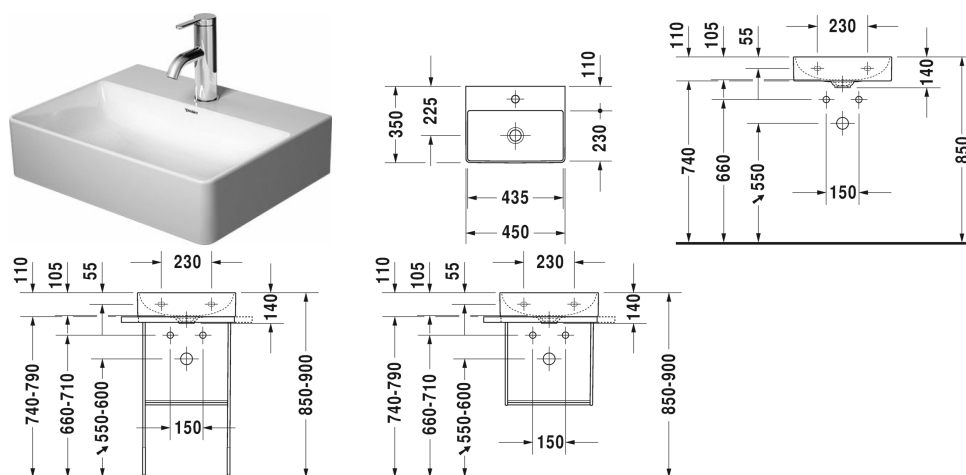

Handrinse basin, furniture handrinse basin	Dimension	Weight	Order number
without overflow, with tap platform, ceramic covered slotted waste included, underneath glazed, 450 mm			
<b>Colors</b>			
00 White Alpin			
<b>Variant</b>			
●	450 x 350 mm	9.900 kilogram	0732450041
☒	450 x 350 mm	9.900 kilogram	0732450070
<b>Infobox</b>			
Metal console: Towel rail can be mounted right or left , Made from DuraCeram, Colours for glass inserts consistent with paint surfaces for furniture page XXX			
Sanitary ceramics with the special WonderGliss surface finish will remain clean and attractive-looking for a long time to come. When ordering WonderGliss please add a "1" as eleventh digit to the model number.			
<b>Accessory</b>			
Towel rail square tube 14 mm, for washbasin # 073245	399 mm	0.400 kilogram	003122
Design Siphon		1.500 kilogram	005036
<b>Suitable products</b>			
Vanity unit for console compact 1 pull-out compartment, 600 x 478 mm	600 x 478 mm		DS5300

## DuraSquare Handrinse basin, furniture handrinse basin # 0732450041 / 0732450070

| < 450 mm > |

Metal console standing ** height adjustable +50 mm, fixings included, for handrinse basin # 073245, Towel rail right/left, reversible, 516 x 333 mm	516 x 333 mm	003109
Metal console wall mounted ** fixings included, for handrinse basin # 073245, Towel rail right/left, reversible, 516 x 333 mm	516 x 333 mm	003110
Glass inserts safety glass, for metal console # 003109, 003110, 420 x 264 mm	420 x 264 mm	009966
Vanity unit wall-mounted 1 door, for DuraSquare # 073245, 434 x 340 mm	434 x 340 mm	XS4060 L/R
Vanity unit floor-standing 1 door, integrated base frame legs with height adjustment, for DuraSquare # 073245, 434 x 340 mm	434 x 340 mm	XS4441 L/R
<b>Recommended faucets</b>		
Single lever basin mixer S ceramic cartridge, Projection 91 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, recommended operating pressure 1 - 5 bar, with pop-up waste set,		C11010001
Single lever basin mixer M ceramic cartridge, Projection 113 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, recommended operating pressure 1 - 5 bar, with pop-up waste set,		C11020001
Single lever basin mixer S ceramic cartridge, Projection 91 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, recommended operating pressure 1 - 5 bar, without pop-up waste set,		C11010002
Single lever basin mixer M ceramic cartridge, Projection 113 mm, flexible connection hoses 3/8", aerator adjustable, normal spray, recommended operating pressure 1 - 5 bar, without pop-up waste set,		C11020002
Single lever basin mixer S FreshStart ceramic cartridge, in centre position cold water, projection 110 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,		TU1011001
Single lever basin mixer S FreshStart ceramic cartridge, in centre position cold water, projection 110 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,		TU1011002
Single lever basin mixer S ceramic cartridge, projection 110 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, with pop-up waste set,		TU1010001
Single lever basin mixer S ceramic cartridge, projection 110 mm, flexible connection hoses 3/8", flow rate 5,0 l/min (3 bar), normal spray, connection size DN15, maximum temperature can be adjusted on installation, recommended operating pressure 1 - 5 bar, without pop-up waste set,		TU1010002

**DuraSquare Handrinse basin, furniture handrinse basin #**  
**0732450041 / 0732450070**

|< 450 mm >|

Single lever basin mixer for concealed installation normal  
spray, ceramic cartridge, connection type: basic set for  
concealed installation, includes: visible parts, recommended  
operating pressure 1 - 5 bar, projection 171 mm,

TU1070004

*All drawings contain the necessary measurements which are subject to standard tolerances. They are stated in mm and are non-binding.  
Exact measurements, in particular for customised installation scenarios, can only be taken from the finished piece.*