

AXOR ShowerSolutions

Thermostatic module Select 670/90 for concealed installation for 5 functions


Finish: **Brushed Brass** Article Number: **18358950**



product features

- consists of: thermostatic module, shower holder
- 5 functions
- simultaneous use of several outlets
- Select push-button on/off control for 5 functions
- depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- thermostat cartridge, Start/stop valve to operate the functions
- maximum flow rate at 3 bar: 38 l/min
- flow rate per outlet: 26 l/min
- flow rate by simultaneous use of all outlets: 38 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- for shower hoses with a conical nut
- connection type: basic set
- Thermostat is delivered with buttons hand shower, Mono, PowderRain inside, PowderRain outside, overhead shower

Technology



AXOR ShowerSolutions

Thermostatic module Select 670/90 for concealed installation for 5 functions


Finish: **Brushed Brass** Article Number: **18358950**



Product image



Scale drawing

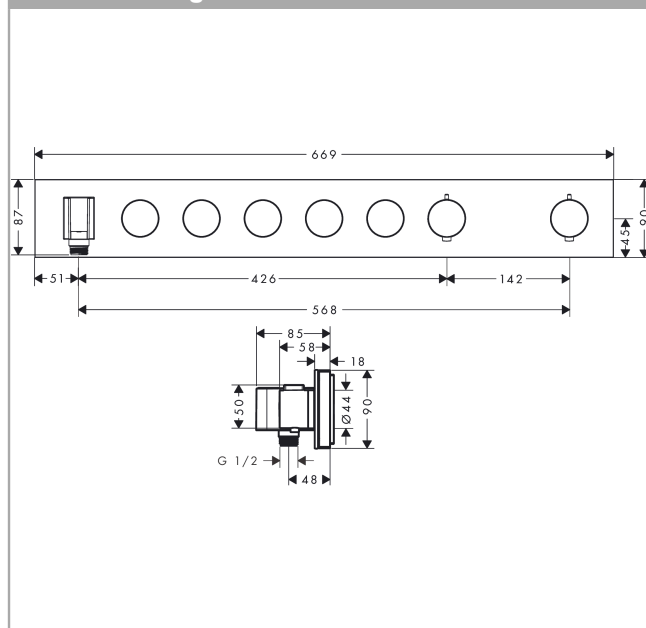

AXOR ShowerSolutions
Thermostatic module Select 670/90 for concealed installation for 5 functions
 Finish: **Brushed Brass** Article Number: **18358950**



Installation examples

AXOR Select
 1831318X/18358XXX

